

# Application of Azolla for 2, 4, 6-Trichlorophenol (TCP) Removal from Aqueous Solutions

Mohammad Ali Zazouli<sup>a</sup>, Davoud Balarak<sup>b\*</sup>, Yusef Mahdavi<sup>b</sup>

<sup>a</sup> Department of Environmental Health Engineering, Health Sciences Research Center, Mazandaran University of Medical Sciences, Sari, Iran.

<sup>b</sup> Student Research Committee, Mazandaran University Of Medical Sciences Sari, Iran.

\*Correspondence should be addressed to Mr. Davoud Balarak; Email: [dbalarak2@gmail.com](mailto:dbalarak2@gmail.com)

## A-R-T-I-C-L-E I-N-F-O

### Article Notes:

Received: Agu 30, 2013

Received in revised form:  
Oct 5, 2013

Accepted: Nov 8, 2013

Available Online: Dec 26,  
2013

### Keywords:

Azolla  
Adsorption  
2,4,6-Trichlorophenol  
water treatment

## A-B-S-T-R-A-C-T

**Background & Aims of the Study:** The 2, 4, 6-Trichlorophenol (TCP) is a phenolic compound which it can produce adverse effects on human and environment. Therefore, the removal of these compounds is necessary. The aim of this study is the investigation of TCP removal by using Azolla filiculoides biomass.

**Materials & Methods:** The Azolla biomass was dried in the sunlight, and then it was crushed and sieved to particle sizes in range of 1-2 mm. Next treated with 0.1M HCl for a period of 5h. The Azolla was washed with distilled water and it was used as adsorbent. The effect of operating parameters such as pH, contact time, TCP concentration and adsorbent dose on the TCP removal efficiency was investigated. The residues concentration of TCP was measured by spectrophotometer in  $\lambda_{max}$  of 296 nm.

**Results:** In optimum condition (pH 3, contact time 120 min, adsorbent dose 10 gr/l and TCP concentration 10 ppm), Azolla was able to remove 95% of TCP from aqueous solutions. The equilibrium data follows the Langmuir isotherm and the proper kinetic model is pseudo-second model.

**Conclusions:** Adsorption process by Azolla filiculoides is an efficient method for removal of 2, 4, 6-Trichlorophenol from aqueous solutions.

Please cite this article as: Zazouli M.A, Balarak D, Mahdavi Y. Application of Azolla for 2, 4, 6-Trichlorophenol (TCP) removal from aqueous solutions. Arch Hyg Sci 2013;2(4):143-9.

## Background

Increasing of public concerns about environmental problems especially the water resources pollution has highlighted the treatment process of wastewater (1,2). Many wastewaters contain significant levels of organic contaminants, phenol and phenol derivatives belong to a group of common environmental contaminants (3,4). Chlorophenols are the name of a group of phenolic compounds that contain between one and five chlorines (5). Phenolic derivatives are

extensively used in producing the certain artificial resins and in the synthesis of many drugs, dyes, weed killers, insecticides, and explosives (6). Chlorophenols can make the taste and odour problems even at concentrations below 0.1 mg/L and can lead to many adverse effects such as toxicity and carcinogenicity (8). Adsorption, chemical oxidation, precipitation, distillation, solvent extraction, ion exchange, membrane processes, reverse osmosis and etc. have been used for removal of phenolic compounds from water and effluents (7, 9). The adsorption is the best method to remove of phenols. This removal process has some

advantages such as high efficiency, easy handling, high selectivity, lower operating cost, easy regeneration of adsorbent and the minimum sludge production (8,10).

The chemistry and surface morphology of the adsorbent can influence on adsorption process. Therefore, it is necessary to find the adsorbents which are economical, easily available, strong affinity and high loading capacity (11). Some of materials such as activated carbon, red mud and rubber seed coat and etc. have been used for pollutant removal in other studies (12-14). Azolla is a floating water fern which it can grows rapidly on the water surface and can form a dense mat, therefore it can lead to many negative effects to aquatic life (15,16).

Therefore, use of Azolla as a biosorbent to remove phenol from the industrial effluent can help to solve both problems including phenol removal as well as weeds problem. Recently, dried and modified Azolla has been used as a proper biosorbent for the treatment of metal-bearing effluents (17,19). There are a few studies, which have suggested that Azolla is capable of removing dyes (20,22) and phenol compounds (12) from aqueous solutions, also. In this study, dried Azolla filiculoides was used as a biosorbent to remove 2, 4, 6-Trichlorophenol (TCP) as a target pollutant from aqueous solution.

**Aims of the study:** The aim of this current paper was to study the effects of biosorption of TCP on dried Azolla filiculoides using batch experiments under different experimental conditions, including pH, biosorbent dosage, contact time, temperature and initial TCP concentrations.

## Materials & Methods

### Adsorbent preparation:

Azolla filiculoides was collected from rice paddy in Sari city and the collected Azolla was


prepared according to study of Zazouli et al (12). The resultant biomass was subsequently used in the sorption experiments.

### Material:

2, 4, 6 Trichlorophenol was purchased from Sigma Aldrich Corporation. The desired concentration of TCP solution was prepared by dilution of stock solution (1000 mg/l). The general characteristic and chemical structure of TCP are presented in table 1 and Fig. 1.

**Table1) characteristics of 2, 4, 6-Trichlorophenol (23).**

C.I. name	Molecular weight	$\lambda_{\max}$ (nm)	Molecular formula
2,4,6-Trichlorophenol	197.45 g/mol	296 nm	C <sub>6</sub> H <sub>2</sub> Cl <sub>3</sub> OH



**Figure 1) The chemical structures 2,4,6-Trichlorophenol (23)**

### Batch adsorption experiments:

It has been proven by literatures that the most effective variables on adsorption process are the pH, adsorbent dose, and contacts time and pollutants concentrations. The initial range of TCP concentrations were 10 to 100 mg/L. The effect of absorbent dosage (0.2-1.4 g), contact time (15,30,45,60,75,90,120,180,240 min) and pH (3,5,7,9,11) were investigated (24). The experiments were carried out in batch system in a 250 ml Erlenmeyer. In each adsorption experiment, the certain concentration of TCP solution poured into the flask. In every experiment, a certain concentration of TCP and specific dose of absorbent spilled into the flask and completely mixed with shaker at 180 rpm for 120 minutes. Then the samples were centrifuged at 3600 rpm for 10 minutes. Finally, the residual concentrations were measured by uv-visible

(made in Hatch, DR5000) in  $\lambda_{\max}$  of 296 nm. The amount of adsorbed TCP was calculated according to the following Eq 1 (25).

$$q_e = (C_o - C_e) V/m \quad (1)$$

Where  $q_e$  is the amount of adsorbed (mg/g),  $C_o$  and  $C_e$  are the initial and equilibrium concentrations of liquid phase (mg/L) respectively,  $V$  is the volume of the solution (L) and  $m$  is the mass of the adsorbent.

### Adsorption isotherms:

The adsorption system design is performed by the equilibrium adsorption isotherms. In this study, two widely used isotherm e.g. Langmuir and Freundlich were applied. The Langmuir isotherm is presented in the Eq 2 (33).

$$c_e / q_e = 1/q_m K_L + c_e / q_m \quad (2)$$

Where  $q_e$  is the amount of adsorbed TCP at equilibrium (mg/g);  $q_m$  (mg/g) is the maximum theoretical biosorption capacity;  $C_e$  is the equilibrium concentration of the TCP in the solution (mg/L); and  $K_L$  (L/mg) is constant amount of biosorption energy.

The Freundlich equation is given by the following Eq. 3 (6, 26).

$$\text{Log } x/m = 1/n \text{ log } C_e + \text{log } K_F \quad (3)$$

Where  $q_e$  is the biosorbed TCP at the equilibrium (mg/g);  $C_e$  is the equilibrium concentration of the TCP in the solution (mg/L);  $K_F$  is a constant amount that indicative the biosorption capacity (2). Fig.5 shows the Freundlich and Langmuir equation obtained for the biosorption TCP onto dried *A. filiculoides*.

### Adsorption kinetics:

The Examination of the adsorption rate process and potential rate controlling step is performed by kinetics models. In present work, obtained kinetic data from batch studies have been analyzed by using the pseudo second-order and pseudo First-order model. The

pseudo-first-order rate equation is expressed as Eq 4 (25):

$$\text{Log } (q_e - q) = \text{log } q_e - k_1 t / 2.3 \quad (4)$$

Where  $q_e$  and  $q$  are the amounts of adsorbed TCP per unit weight of adsorbent (mg/g) at equilibrium and at time  $t$  (min), respectively, and  $k_1$  is the rate constant of adsorption ( $\text{min}^{-1}$ ). Values of  $k_1$  were calculated from the plots of  $\text{log } (q_e - q)$  versus  $t$  for different concentration.

Also the pseudo-second-order rate equation has been given by equation 5 (27):

$$dq / dt = k_2 (q_e - q)^2 \quad (5)$$

Where  $K_2$  the second order rate constant ( $\text{g mg}^{-1} \text{min}^{-1}$ ),  $q$  and  $q_e$  are the amount of the adsorbed on the adsorbent (mg/g) at equilibrium and at time  $t$ . The integration from Eq 6 (28):

$$t / q = 1/k_2 q_e^2 + 1/ q_e t \quad (6)$$

The plot of  $t/q$  against  $t$  of Eq (6) will give a linear relationship. The  $q_e$  and  $K_2$  can be determined from the slope and the intercept of the plot.

## Results

The Fig.2 indicates that the TCP removal efficiency has increased during the contact time 120 min. It reached to balance after this time. Therefore, the optimum contact time was 120 min. The adsorption rate decreases by increasing of the initial concentration, so the adsorption rate in concentration of 10 ppm was obtained two times more than 100 ppm. The results of effect the increasing TCP initial concentration are revealed in Fig. 3.

### Effect of pH and adsorbent dosage:

The Fig 3, 4 shows the effect of pH and adsorbent dosage on adsorption rate. As can be seen the maximum adsorption rate was

performed in acidic pH and it is decreased in alkaline pH.

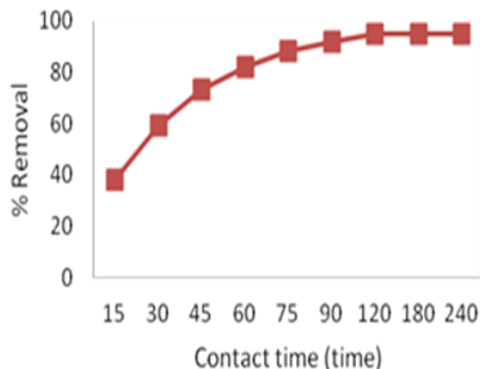


Figure 2) Effect of contact time on removal efficiency of TCP (pH = 5, adsorbent dosage 10 gr/l, TCP concentration: 10 ppm)

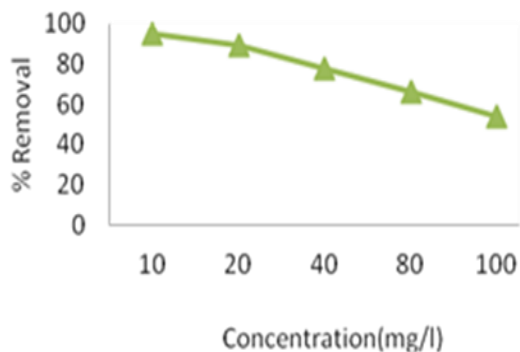


Figure 3) Effect of TCP concentration on removal efficiency of TCP

(Time = 120 min, dose: 10 gr/l, pH = 5)

The adsorption rate was increased by increasing of adsorbent dosage up to concentration of 10 g/L, and then was reached to equilibrium. As a result adsorption rate by increasing the adsorbent dosage was increased too.

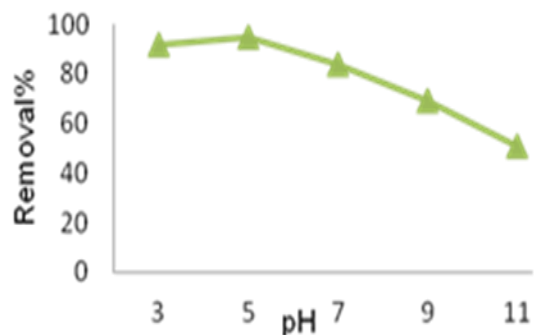


Figure 4) Effect of pH on removal efficiency of TCP (contact time = 120 min, dose: 10 gr/l, TCP concentration: 10 ppm)

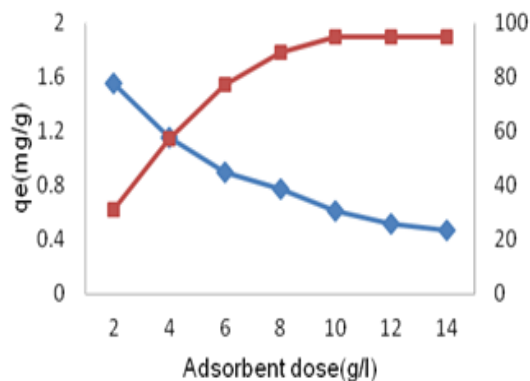
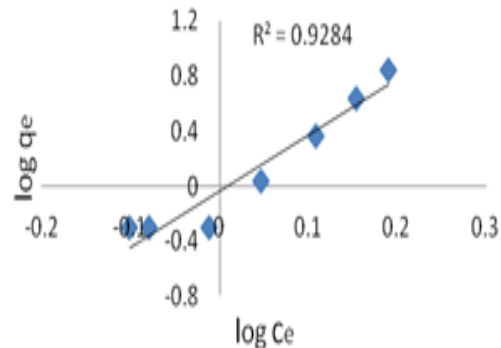


Figure 5) Effect of adsorbent dose on removal efficiency of TCP (contact time = 120 min, pH = 5, TCP concentration: 10 ppm)

### Adsorption kinetics and isotherms:

The isothermal models and adsorption kinetics show in Fig. 5 and Table 2.



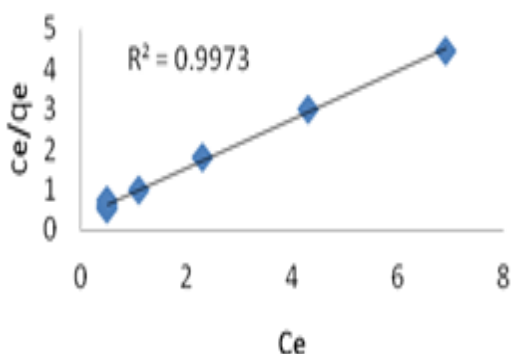


Figure 5) isotherm models: (a) Freundlich (b) Langmuir

Table 2) the adsorption kinetic model constants

pseudo second-order model			pseudo First-order model			
co(mg/l)	K=(g/mg min)	R <sup>2</sup>	q	K=(1/min)	R <sup>2</sup>	q(mg/g)
10	0.09	0.984		0.064	0.918	1.56
1.89						
25	0.12	0.994		0.079	0.944	3.7
4.1						
50	0.14	0.998		0.085	0.961	5.9
6.2						

## Discussion

The results indicated that the increasing of the contact time gives rise the TCP removal efficiency due to increase the contact between adsorbate and adsorbent in the initial minutes. The TCP adsorption was rapidly decreased with time that it could be because of declining the TCP concentration and decreasing the active points on adsorbent surface area. There is a lot of empty sites on surface of adsorbent in early stages of adsorption and they are occupied by TCP molecules with time which it is consistent with several studies that it conducted on Chlorophenols removal by other absorbent (23, 29, 30). As shown Fig. 2, TCP removal efficiencies have been increased when their concentrations have been decreases. This phenomenon probably could be due to

enhancing the contact of adsorbate with available sites of adsorbent. In other words, the adsorbent sites were decreased on the adsorbent. Therefore when the initial TCP concentration increases, the adsorbent sites filled earlier and the TCP removal efficiency was decreased (15). Indeed, the removal efficiency is increased by decreasing the initial concentration of TCP due to the being constant amount of adsorbent and available adsorb positions. It is consistent with other conducted studies (15,31). pH plays an important role in all process and adsorption capacity. The pH can influence on the different aspects of adsorption process containing the adsorbent surface charge, the degree of ionization, separation of functional groups on the adsorbent active sites and solution chemistry. Many researchers have reported that pH plays a main role in electrostatic force between adsorbent and TCP. In this study the maximum TCP removal was obtained in pH=5 which is similar to Liang Ren study on TCP removal by activated carbon (23). The increasing of the adsorbent dose can lead to gives rise adsorption efficiency because of increasing of the active surface of adsorbent. The results indicated that while efficiency has been increased with increasing adsorbent dose, however the adsorbed TCP per gram of adsorbent has been decreased and it probably is because of the active sites onto adsorbent that are not saturated yet. By adding the adsorbent dose, the total adsorbent capacity not to use completely and it would reduce the absorption rate per unit mass of the adsorbent (15). The R<sup>2</sup> of kinetic models suggested that the pseudo second- order model mechanism is predominant which means the uptake process follows the pseudo-second-order expression with Correlation coefficients were greater of 0.99. The lowest correlation coefficient in pseudo second- order model was better than the first order model correlation coefficients (25,27,32,33). The correlation coefficient (R<sup>2</sup>) for Freundlich equation was obtained 0.9284 which it was lower than the R<sup>2</sup> value obtained

from Langmuier equation and it can indicated that the better has been fitted the equilibrium obtained in this study (8,28, 34).

## Footnotes

### Acknowledgments:

The authors are grateful from Student research committee of Mazandaran University of Medical Sciences for supporting of this research.

### Conflict of Interest:

The authors declare no conflict of interest.

## References

- Eshaghi Z. Extraction and Determination of Three Chlorophenols by Hollow Fiber Liquid Phase Microextraction- Spectrophotometric Analysis, and Evaluation Procedures Using Mean Centering of Ratio Spectra Method. *Am J Anal Chem* 2011; 2(1):1-8.
- Sze MFF, McKay G. Enhanced mitigation of para-chlorophenol using stratified activated carbon adsorption columns. *Water res* 2012; 46(3):700-10.
- Silva CD, Gómez R, Cardoso B. Simultaneous removal of 2-chlorophenol, phenol, p-cresol and p-hydroxybenzaldehyde under nitrifying conditions: Kinetic study. *Bioresour Technol* 2011;102(11):6464-8.
- Zazouli MA, Balarak D, Mahdavi Y, Barafraشتهpour M, Ebrahimi M. Adsorption of Bisphenol from Industrial Wastewater by Modified Red Mud. *J Health Develop* 2013;2(1):1-11.
- Eker S, Kargi F. Performance of a hybrid-loop bioreactor system in biological treatment of 2,4,6-trichlorophenol containing synthetic wastewater: Effects of hydraulic residence time. *J Hazard Mater* 2007;144(1-2):86-92.
- Kumar NS, Subbaiah MV, Reddy AS, Krishnaiah A. Biosorption of phenolic compounds from aqueous solutions onto chitosan-abrus precatorius blended beads. *Journal of Chemical Technol Biotechnol* 2009;84(7):972-81.
- Kamble SP, Mangrulkar PA, Bansiwal AK, Rayalu SS. Adsorption of phenol and o-chlorophenol on surface altered fly ash based molecular sieves. *Chemical Eng J* 2008;138(1-3):73-83.
- Nadavala SK, Swayampakula K, Boddu VM, Abburi K. Biosorption of phenol and o-chlorophenol from aqueous solutions on to chitosan-calcium alginate blended beads. *J Hazard Mater* 2009;162(1):482-9.
- Rubín E, Rodríguez P, Herrero R. Biosorption of phenolic compounds by the brown alga *Sargassum muticum*. *J Chem Technol Biotechnol* 2006;81(7):1093-99.
- Kermani M, Pourmoghaddas H, Bina B, Khazaei Z. Removal of phenol from aqueous solutions by rice husk ash and activated carbon. *Pak J Biological Sci* 2006;9(10):1905-10.
- Zazouli MA, Balarak D, Mahdavi Y. Pyrocatechol Removal From Aqueous Solutions by Using *Azolla Filiculoides*. *Health Scope* 2013;2(1):1-6.
- Zazouli MA, Yazdani J, Balarak D, Ebrahimi M, Mahdavi Y. Removal Acid Blue 113 from Aqueous Solution by Canola. *J Mazandaran Univ Med Sci* 2013;23(2):73-81. [Full Text in Persian]
- Asilian H, Moussavi GR, Mahmoudi M. Adsorption of Reactive Red 198 Azo Dye from aqueous solution onto the waste coagulation sludge of the water treatment plants. *Iran J Health Environ* 2010;3(1):93-102.
- Zazouli MA, Balarak D, Mahdavi Y, Ebrahimi M. Adsorption rate of 198 reactive red dye from aqueous solutions by using activated red mud. *Iran J Health Sci* 2013;1(1):29-40.
- Dyanati RA, Yousefi Z, Cherati JY, Balarak D. Adsorption of phenol by modified azolla from Aqueous Solution. *J Mazandaran Univ Med Sci* 2013;22(2):13-21.
- Filizade Y. Survey Ecology Excessive Growth Of *Azolla* In Anzali Wetland And Quality Control. *Iran Natural Resour* 2002;55(1):65-82.
- Bennicelli R, pniewska Z, Banach A, Szajnocha K, Ostrowski J. The ability of *Azolla caroliniana* to remove heavy metals (Hg(II), Cr(III), Cr(VI) from municipal waste water. *Chemosphere* 2004;55(1):141-6.
- Pandey VC. Phytoremediation of heavy metals from fly ash pond by *Azolla caroliniana*. *Ecotoxicol Environ Safe* 2012; 82(3):50-6.
- Zhao M, Duncan JR. Removal and recovery of nickel from aqueous solution and electroplating rinse effluent using *Azolla filiculoides*. *Process Biochem* 1998;33(3): 249-55.
- Vafaei F, Khataee AR, Movafeghi A, Lisar SYS, Zarei M. Bioremoval of an azo dye by *Azolla filiculoides*: Study of growth, photosynthetic pigments and antioxidant enzymes status. *Int Biodeterior Biodegradation* 2012;75(4):194-200.

21. Padmesh TVN, Vijayaraghavan K, Sekaran G, Velan M. Batch and column studies on biosorption of acid dyes on fresh water macro alga *Azolla filiculoides*. *J Hazard Mater* 2005 125(1-3):121-9.
22. Padmesh TVN, Vijayaraghavan K, Sekaran G, Velan M. Application of *Azolla rongpong* on biosorption of acid red 88, acid green 3, acid orange 7 and acid blue 15 from synthetic solutions. *Chem Eng* 2006;122: 55-63.
23. Ren L, Zhang J, Li Y, Zhang C. Preparation and evaluation of cattail fiber-based activated carbon for 2,4-dichlorophenol and 2,4,6-trichlorophenol removal. *Chem Eng J* 2011(168):553-61.
24. Gholizadeh A, Kermani M, Gholami M, Farzadkia M. Comparative Investigation of 2-Chlorophenol and 4-Chlorophenol Removal Using Granulated Activated Carbon and Rice Husk Ash. *Toolo-e- Behdasht* 2012;11(3):66-79. [Full Text in Persian]
25. Kuleyin A. Removal of phenol and 4-chlorophenol by surfactant-modified natural zeolite. *J Hazard Mater* 2007;144: 307-15.
26. Gulnaz O, Sahnurova A, Kama S. Removal of Reactive Red 198 from aqueous solution by *Potamogeton crispus*. *Chem Eng* 2011;174:579-85.
27. Baker HM, Ghanem R. Evaluation of treated natural zeolite for the removal of *o*-chlorophenol from aqueous solution. *Desalination* 2009;249:1265-72.
28. Wang SL, Tzou YM, Lua YH, Sheng G. Removal of 3-chlorophenol from water using rice-straw-based carbon. *J Hazard Mater* 2007;147:313-8.
29. Andini S, Cioffib R, Colangelo F, Montagnaro F, Santoro L. Adsorption of chlorophenol, chloroaniline and methylene blue on fuel oil fly ash. *J Hazard Mater* 2008(157): 599-604.
30. Wang S-L, Tzoua Y-M, Lua Y-H, Sheng G. Removal of 3-chlorophenol from water using rice-straw-based carbon. *J Hazard Mater* 2007(147):313-8.
31. Gholizadeh A, Kermani M, Gholami M, Farzadkia M. Comparative Investigation of 2-Chlorophenol and 4-Chlorophenol Removal Using Granulated Activated Carbon and Rice Husk Ash. *Toolo-e- Behdasht*. 2012;11(3):66-79. [Full Text in Persian]
32. Dursun G, Cicek H, Dursun AY. Adsorption of phenol from aqueous solution by using carbonised beet pulp. *J Hazard Mater* 2005(125):175-82.
33. Liu QS, Zheng T, Wang P, Jiang J-P, Li N. Adsorption isotherm, kinetic and mechanism studies of some substituted phenols on activated carbon fibers. *Chem Eng J* 2010(157):348-56.
34. Dianati RA, Yazdani J, Belarak D. Effect of sorbitol on phenol removal rate by lemna minor. *J Mazandaran Univ Med Sci* 2013;22(2):58-64.