

Heavy Metals Removal from Sewage Sludge and Municipal Solid Waste (MSW) by Co-Composting Process

Vahid Babae Darzi^a, Mohammad Javad Mohammadi^{b,c}, Abdolkazem Neisi^d, Ahmad Reza Yari^e, Afshin Takdastan^{f*}, Esmail Charkhloo^g, Mahsa Moradi^h, Yusef Omid Khaniabadi^h, Abdolrahim Yusefzadeh^{j,i}

^aDepartment of Environmental Engineering, Environmental Technologies Research Center, Babol Noshirvani University of Technology, Babol, Iran.

^bAbadan School of Medical Sciences, Abadan, Iran.

^cStudent Research Committee, Department of Environmental Health Engineering, School of Health and Environmental Technologies Research Center, Ahvaz Jundishapur University of Medical Sciences, Ahvaz, Iran.

^dDepartment of Environmental Health Engineering, School of Health AND Environmental Technologies Research Center, Ahvaz Jundishapur University of Medical Sciences, Ahvaz, Iran.

^eResearch Center for Environmental Pollutants, Qom University of Medical Sciences, Qom, Iran.

^fDepartment of Environmental Health Engineering, School of Health AND Environmental Technologies Research Center, Ahvaz Jundishapur University of Medical Sciences, Ahvaz, Iran.

^gDepartment of Environmental Health Engineering, School of Health, Jiroft University of Medical Sciences, Jiroft, Iran.

^hAir Pollution and Respiratory Diseases Research Center, Ahvaz Jundishapur University of Medical Sciences, Ahvaz, Iran.

^jYoung Researchers and Elite Club, Islamic Azad University, Sardasht Branch, Sardasht, Iran.

ⁱYoung Researchers and Elite Club, Islamic Azad University, Uromyeh Branch, Uromyeh, Iran.

*Correspondence should be addressed to Dr. Afshin Takdastan, Email: afshin_ir@yahoo.com

A-R-T-I-C-L-E-I-N-F-O

Article Notes:

Received: Jan 17, 2017

Received in revised form:
Apr 29, 2017

Accepted: Jun 18, 2017

Available Online: Jun 28,
2017

Keywords:

Co-composting
Solid Waste
Heavy Metals
sludge
Ahvaz
Iran.

A-B-S-T-R-A-C-T

Background & Aims of the Study: One of the most important pollutants in drinking water, air and soils is heavy metals. It is very harmful for humans and other live organisms. The purpose of this study was the usage of a co-composting process for removal of heavy metals from municipal solid waste and sewage sludge.

Materials and Methods: This experimental study was a conducted sewage sludge and municipal solid waste. For collection of samples from urban solid waste composting and wastewater treatment plant, a 200 mL polyethylene bottles was used, samples after acidification were stored in a dark place at 4°C temperature until the metals analysis the heavy metals values remaining in the samples was measured by graphite furnace absorption spectrometer method (Varian, SpectrAA 240, Australia). In this study, we used SPSS version 16 for data processing; and they were also analyzed by descriptive statistics.

Results: Result of this study showed that values of C/N in the first, second and third stage compost were 31.7, 27.3 and 41.8, respectively. Based on the result of this study the value of removal of Cd with 9.8 mg kg⁻¹ in first stage and Cr, Cu and Zn with 89, 21 and 87.6 mg kg⁻¹ in third stage were highest treatment.

Conclusion: Our results show that co-composting process between many treatment processes having to be cost effective for heavy metal removal from solid waste and wastewater treatment.

Please cite this article as: Babae Darzi V, Neisi A, Mohammadi MJ, Yari AR, Takdastan A, Charkhloo E, Omid Khaniabadi Y, et al. Heavy Metals Removal from Sewage Sludge and Municipal Solid Waste (MSW) by Co-Composting Process. Arch Hyg Sci 2017;6(3):276-280.

Background

In recent years, Municipal Solid Waste (MSW) and Sewage Sludge (SS) were two main factors in urban population (1,2). The residual material removed from wastewater treatment facilities is defined as a sewage sludge (3,4). Megacities in development countries opposed to MSW and SS (1,5). Composting process is one of the most important methods for removal of the organic and heavy metals content of solid waste (6-8).

Co-composting process was used for treatment of Heavy Metal (HM) from MSW and SS (7,8). Based on the result of different studies, the main parameters in the control of a composting process are moisture content, temperature, pH, C/N ratio, particle size, nutrient content and aeration (5,8-10). The major industries that use co-composting processes are olive mill wastes, winery and distillery wastes (8,11-13). Composting of Wastewater Treatment Plants (WTPS) has been practiced but co-composting of SS and MSW is not wide spread (14-16). Improving soil structure (soil conditioner or fertilizer) is the most important use of Compost material (17,18).

Aims of the study:

The aim of this study was the usage of a co-composting process for removal of heavy metals from municipal solid waste and sewage sludge in Mazandaran province (northern Iran), in 2015.

Materials & Methods

Experimental Design

In this study, an in-vessel system has been widely applied in Mazandaran province (northern Iran), in 2015. Samples were collected from urban WTP and Solid Waste Composting (SWC). Duration of composting process and nutrient contents are two important factors in the compost products, using bioreactor system. Samples were collected, using 200 mL polyethylene bottles that were

washed two times with deionized water. All samples (60 samples) were acidified after transferring to the laboratory. Then, prepared sample stored in a dark place at 4°C temperature. Before analysis, we used filters by 0.45µm Millipore. Finally, Cr, Cd, Zn and Cu were measured by graphite furnace absorption spectrometer (AAS) method (Varian, AA 240, Australia) (19). Figure 1 shows the schematic of a typical in-vessel process.

Statistical Analysis

In this study, the collected data were entered into SPSS version 16. Data analysis were performed, using descriptive statistics (frequency, mean and standard deviation for each variable).

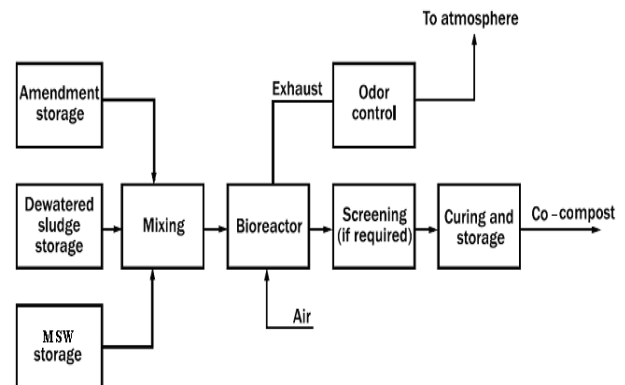


Figure 1) Schematic of in-vessel composting process


Results

In this study, the data of co-composting process for HM removal from MSW and SS was described. In-vessel systems is one of the expensive methods for composting process that can developed and widespread used for the safety of the production of green bio wastes. In Table 1 the chemical composition of clinoptilolite is presented (wt/wt%).

In Table 2, the value removal efficiencies of Cr, Cd, Zn and Cu is shown. C/N ratio in three co-composting stages showed in Figure 2. According to the result of this study, values of C/N in the first, second and third stage compost were 31.7, 27.3 and 41.8, respectively.

Table 1) The chemical and physical profile of clinoptilolite

Chemical content	
Mn	38.0 ppm
Cu	2.90 ppm
Zn	24.20 ppm
Sr	233.00 ppm
Mo	<1.00 ppm
Cr	6.00 ppm
Zr	22.50 ppm
Ba	65.00 ppm
B	<10.00 ppm
Salinity %	0.03
Lime	1.06
Water	45.60
Physical properties	
Bulk density	1000-1200 Kg m ⁻³
Unit volume weight	2150-2250 Kg m ⁻³
Visible porosity (%)	39.40-44.20

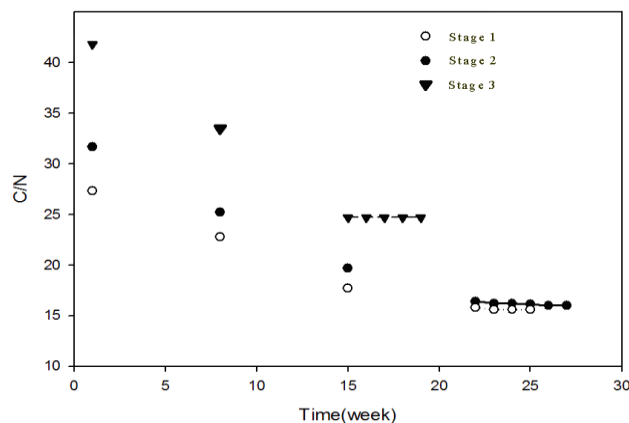**Figure 2) Time course of C/N ratio during stage 1 to stage 3****Table 2) Comparison of the removal of heavy metal at different stages with sludge**

Heavy metals	Cd	Cr	Cu	Zn
	dry weight (mg kg ⁻¹)	dry weight (mg kg ⁻¹)	dry weight (mg kg ⁻¹)	dry weight (mg kg ⁻¹)
Stage 1	9.08	29.5	11.3	42
Stage 2	1.6	31.2	5.78	37.8
Stage 3	0.0	0.0	0.0	2.17
Sludge	1.42	89	21	87.6

Discussion

One of the most dangerous substances in waters, soils and sediments is heavy metals. Clinoptilolite usually used the most often compare to another natural zeolites. $(K_2, Na_2, Ca)_3 [Al_6Si_{30}O_{72}] \cdot 24 H_2O$ is formula this zeolite (20). Semnan city of Iran is a center of concentrated natural clinoptilolite, selecting diameters of < 5 mm, which were washed by distilled water to remove turbidity and dried at room temperature. According to the result of this study, by adding the amount of sawdust in the third stage, C/N ratio causes an increase and reduction in the duration of compost production. Based on several studies, exposure to HM had toxic effects for humans and environment (2,13,21). Result of our study

showed that co-composting process can be used as a cost-effective method for removal of other pollutants from solid waste and wastewater. Soil microbial biomass (SMB) and various enzyme activities can accumulated HM reduce. Clinoptilolite that is one of the natural zeolites, by ion exchange processes are effectively used for HM removal applications (2,4,5,8,13,19,21,22). Recycle of clinoptilolite not seemed to be valuable at first glance because of low cost mineral. However, developments of sustainable treatment technologies oblige no further waste production in addition to conservation of resources. Subsequently, regeneration of clinoptilolite would enable the recovery of both the sorbent and metal from the resulting concentrated regenerate solution. HM treatment by

clinoptilolite can be used both forms natural/as-received and chemically modified/pretreated (2,4,5,8,13,19,21,22). Using clinoptilolite decreases heavy metals from SS in compost (Table 1). Sawdust dilutes metals and it also causes a decrease in concentrations of heavy elements in combined compost mass.

Conclusion

According to the result of this study, co-composting process between many treatment processes having to be cost-effective for solid waste and wastewater treatment. Result of this study showed that it can be used to design the co-composting process experiments for removal of wide range of heavy metals in solid waste and wastewater. The data presented here will be useful for the managers for proper treatment of produced SS and MSW.

Footnotes

Acknowledgement:

The authors would like to thank Babol Noshirvani University of Technology and Ahvaz Jundishapur University of Medical Sciences for the financial supporting this research.

Conflict of Interest:

The authors declared no conflict of interest.

Funding/Support:

This work was funded by the grant: (93.106.13) from Babol Noshirvani University of Technology.

References

1. Erkut E, Karagiannidis A, Perkoulidis G, Tjandra SA. A multicriteria facility location model for municipal solid waste management in North Greece. *Eur J Oper Res* 2008;187(3):1402-21.
2. Takdastan A, Azimi AA, Jaafarzadeh N. Biological excess sludge reduction in municipal wastewater treatment by chlorine. *Asian J Chem* 2010;22(3):1665.
3. Mahmoudi P, Takdastan A, Alavi N, Ali A, Kaydi N. Study of excess sludge reduction in conventional activated sludge process by heating returned sludge. *Asian J Chem* 2013;25(5):2627.
4. Li G, Zhang F, Sun Y, Wong J, Fang M. Chemical evaluation of sewage sludge composting as a mature indicator for composting process. *Water Air Soil Pollut* 2001;132(3-4):333-45.
5. Ruggieri L, Gea T, Mompeó M, Sayara T, Sánchez A. Performance of different systems for the composting of the source-selected organic fraction of municipal solid waste. *Biosys Eng* 2008;101(1):78-86.
6. Talebbeydokhti N, Amiri H, Hashemi Shahraki M, Azadi S, Ghanbari Ghahfarokhi S. Optimization of Solid Waste Collection and Transportation System by Use of the TransCAD: A Case Study. *Arch Hyg Sci* 2013;2(4):150-7.
7. Alavi N, Goudarzi G, Babaei AA, Jaafarzadeh N, Hosseinzadeh M. Municipal solid waste landfill site selection with geographic information systems and analytical hierarchy process: A case study in Mahshahr County, Iran. *Waste Manag Res* 2013;31(1):98-105.
8. Sánchez-Arias V, Fernández FJ, Villaseñor J, Rodríguez L. Enhancing the co-composting of olive mill wastes and sewage sludge by the addition of an industrial waste. *Bioresour Technol* 2008;99(14):6346-53.
9. Diaz M, Madejón E, Lopez F, Lopez R, Cabrera F. Optimization of the rate vinasse/grape marc for co-composting process. *Process Biochem* 2002;37(10):1143-50.
10. Wong JW, Fang M. Effects of lime addition on sewage sludge composting process. *Water Res* 2000;34(15):3691-8.
11. Fernández F, Sánchez-Arias V, Villaseñor J, Rodríguez L. Evaluation of carbon degradation during co-composting of exhausted grape marc with different biowastes. *Chemosphere* 2008;73(5):670-7.
12. Bustamante MA, Moral R, Paredes C, Vargas-García M, Suárez-Estrella F, Moreno J. Evolution of the pathogen content during co-composting of winery and distillery wastes. *Bioresour Technol* 2008;99(15):7299-306.
13. Takdastan A, Eslami A. Application of energy spilling mechanism by para-nitrophenol in biological excess sludge reduction in batch-activated sludge reactor. *Int J Energy Environ Eng* 2013;4(1):1-7.
14. Bari QH, Koenig A. Effect of air recirculation and reuse on composting of organic solid waste. *Resour Conserv Recycl* 2001;33(2):93-111.
15. Vlyssides A, Mai S, Barampouti E. An integrated mathematical model for co-composting of agricultural solid wastes with industrial wastewater. *Bioresour Technol* 2009;100(20):4797-806.
16. Amouei A, Hosseini SR, Khafri S, Tirgar A, Aghalari Z, Faraji H, et al. Knowledge, Attitude and Practice of Iranian Urban Residents Regarding the

Management of Household Hazardous Solid Wastes in 2014. Arch Hyg Sci 2016;5(1):8-1.

17. Grigatti M, Ciavatta C, Gessa C. Evolution of organic matter from sewage sludge and garden trimming during composting. Bioresour Technol 2004;91(2):163-9.

18. Zorpas AA, Kapetanios E, Zorpas GA, Karlis P, Vlyssides A, Haralambous I, et al. Compost produced from organic fraction of municipal solid waste, primary stabilized sewage sludge and natural zeolite J Hazard Mater 2000;77(1):149-59.

19. Keshtkar M, Dobaradaran S, Soleimani F, Karbasdehi VN, Mohammadi MJ, Mirahmadi R, et al. Data on heavy metals and selected anions in the Persian popular herbal distillates. Data Brief 2016;8:21-5.

20. Mozgawa W, Krol M, Pichor W. Use of clinoptilolite for the immobilization of heavy metal ions and preparation of autoclaved building composites. J Hazard Mater 2009;168(2):1482-9.

21. Nejad MH, Takdastan A, Jaafarzadeh N, Mogadam MA, Mengelizadeh N. Removal of orthophosphate from municipal wastewater using chemical precipitation process in Ahvaz wastewater treatment plant, Iran. Asian J Chem 2013;25(5):2565.

22. Niri MV, Mahvi AH, Alimohammadi M, Shirmardi M, Golastanifar H, Mohammadi MJ, et al. Removal of natural organic matter (NOM) from an aqueous solution by NaCl and surfactant-modified clinoptilolite. J Water Health 2015;13(2):394-405.